


CONVOLUTED PTFE HOSE

Rubber Fab convoluted PTFE hoses are vacuum formed in an open pitched, helical design for easy cleaning. These hoses are rated for full vacuum, crush resistant and easy to flex, providing a far tighter bend radius than smooth bore alternatives.

RF-CTLP
RF-CTLPB
RF-CTLPP
RF-CTLPPB

RF-CTLP – Convoluted Low-Profile PTFE Lined Hose with Braided Stainless Steel Cover

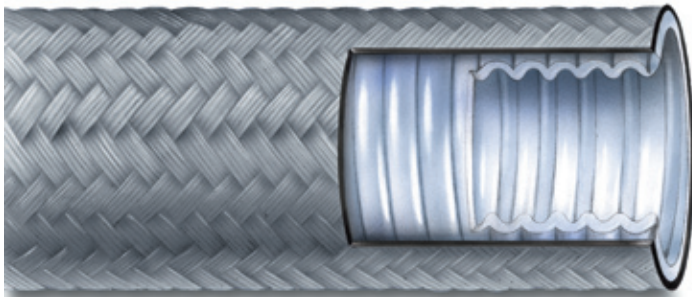

TUBE:
Seamless White
Convoluted PTFE


COVER:
Braided Stainless
Steel

TEMPERATURE:
-20°F to 350°F

Part Number	I.D.	O.D.	Working Pressure*	Vacuum	Bend Radius
08RFCTLP	.470	.748	1425 psi	Full	2.0"
12RFCTLP	.720	1.04	1300 psi	Full	2.7"
16RFCTLP	.970	1.35	1100 psi	Full	4.0"
24RFCTLP	1.54	2.03	700 psi	25	6.0"
32RFCTLP	1.97	2.46	525 psi	15	7.5"
48RFCTLP	2.91	3.70	175 psi	5	14.0"
64RFCTLP	3.93	5.00	150 psi	5	16.0"

*at 68°F

RF-CTLPB – Convoluted Low Profile Black Conductive PTFE Lined Hose with Braided Stainless Steel Cover

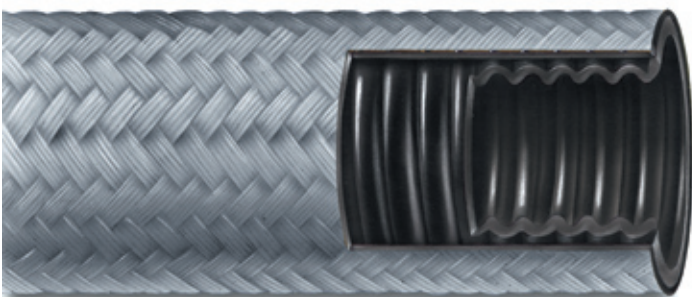

TUBE:
Seamless Black
Conductive
Convoluted PTFE

COVER:
Braided Stainless
Steel

TEMPERATURE:
-20°F to 350°F

Part Number	I.D.	O.D.	Working Pressure*	Vacuum	Bend Radius
08RFCTLPB	.470	.748	1425 psi	Full	2.0"
12RFCTLPB	.720	1.04	1300 psi	Full	2.7"
16RFCTLPB	.970	1.35	1100 psi	Full	4.0"
24RFCTLPB	1.54	2.03	700 psi	25	6.0"
32RFCTLPB	1.97	2.46	525 psi	15	7.5"
48RFCTLPB	2.91	3.70	175 psi	5	14.0"
64RFCTLPB	3.93	5.00	150 psi	5	16.0"


*at 68°F

NOTE: Black carbon filled liner does not meet 3A, FDA and USDA requirements.

RUBBER FAB
technologies group

www.rubberfab.com

RF-CTLPP – Convoluted Low Profile PTFE Lined Hose with Braided Polypropylene Cover

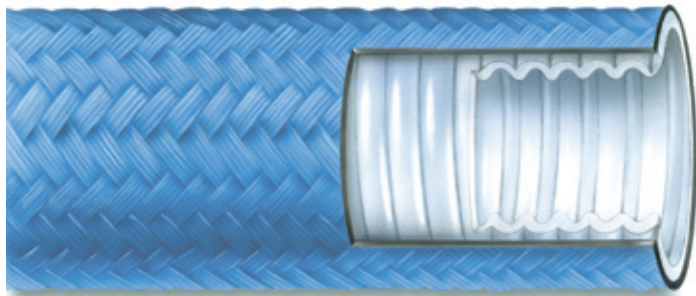

TUBE:
Seamless White PTFE

COVER:
Braided Blue Polypropylene†


TEMPERATURE:
-20°F to 250°F

† Also available with Red Kynar® cover

Part Number	I.D.	O.D.	Working Pressure*	Vacuum	Bend Radius
08RFCTLPP	.470	.855	250 psi	Full	2.0"
12RFCTLPP	.720	1.16	250 psi	Full	2.7"
16RFCTLPP	.970	1.44	250 psi	Full	4.0"
24RFCTLPP	1.54	2.15	250 psi	25	6.0"
32RFCTLPP	1.97	2.56	200 psi	15	7.5"
48RFCTLPP	2.91	3.92	125 psi	5	14.0"
64RFCTLPP	3.93	5.22	100 psi	5	16.0"

*at 68°F

RF-CTLPPB – Convoluted Low Profile Black Conductive PTFE Lined Hose with Braided Polypropylene Cover

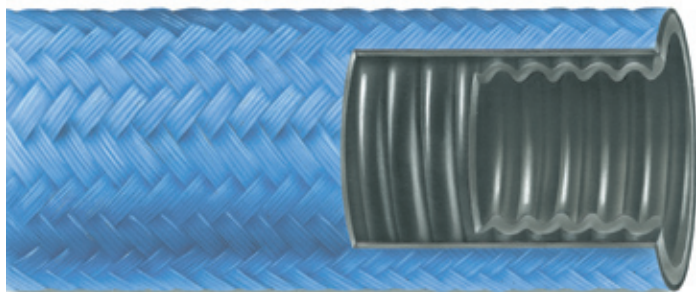

TUBE:
Seamless Black Conductive PTFE

COVER:
Braided Blue Polypropylene†

TEMPERATURE:
-20°F to 250°F

Part Number	I.D.	O.D.	Working Pressure*	Vacuum	Bend Radius
08RFCTLPP	.470	.855	250 psi	Full	2.0"
12RFCTLPP	.720	1.16	250 psi	Full	2.7"
16RFCTLPP	.970	1.44	250 psi	Full	4.0"
24RFCTLPP	1.54	2.15	250 psi	25	6.0"
32RFCTLPP	1.97	2.56	200 psi	15	7.5"
48RFCTLPP	2.91	3.92	125 psi	5	14.0"
64RFCTLPP	3.93	5.22	100 psi	5	16.0"

*at 68°F

NOTE: Black carbon filled liner does not meet 3A, FDA and USDA requirements.

RUBBER FAB OFFERS A FULL LINE OF: SANITARY FITTINGS, ADAPTERS AND GASKETS



RF-CTLP RF-CTLPP

Meets

- 3A Sanitary Standard
- USP Class VI Standards
- FDA 21 CFR 177.1550

RF-CTLP/CTLPP Features

- Full vacuum rating
- Withstands high velocity and pressure surges
- Unaffected by continuous flexing or vibration when used in accordance with minimum bend radius specifications
- Available conductive liner for static dissipation
- Available in bulk or fabricated assemblies

Applications

- Food and beverage processing
- Pharmaceutical processing
- Cosmetics
- Hot CIP solutions
- Chemical products
- Low pressure steam applications (CTLP only)

Connections

- Broad variety fittings in 316L Stainless Steel, PTFE encapsulated or non-metallic materials
- Electropolished Stainless Steel fittings available
- Crimped fittings available in other high quality alloys

RUBBER FAB
technologies group

Rubber Fab Technologies Group

26 Brookfield Drive • Sparta, NJ 07871
phone: 973-579-2959 • fax: 973-579-7275

www.rubberfab.com

Rubber Fab Technologies Group is a member of:

